
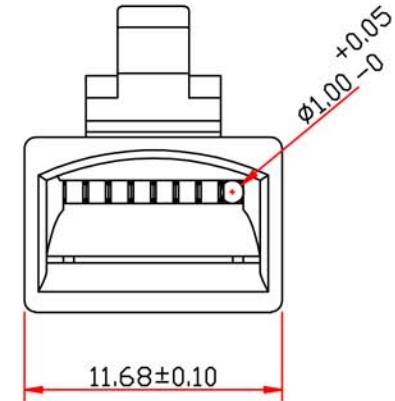
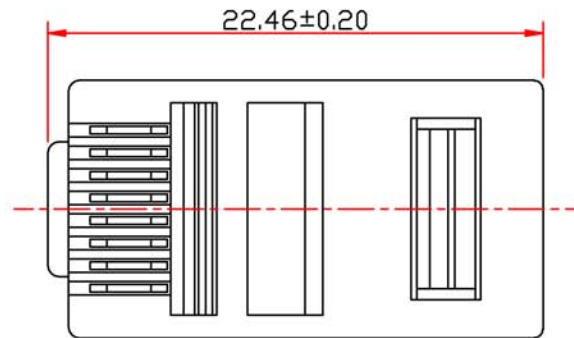
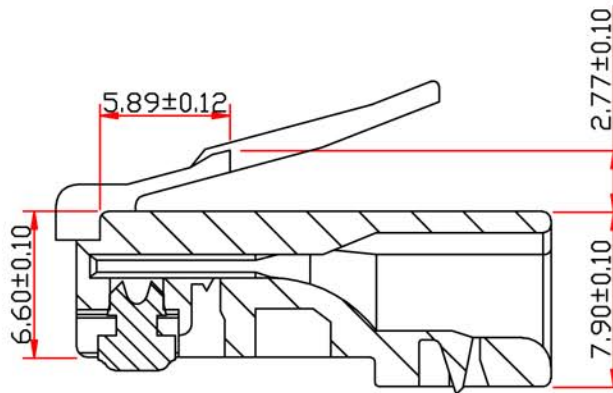



## NOTES:

1. Material of housing: Polycarbonate, 94V-2, NO Poison.
2. Material contact: C2680
3. Contact area plated gold over  $3\mu"/6\mu"/15\mu"/30\mu"$  and  $50\mu"$ .
4. Contact area plated Nickel over  $100\mu"$ .
5. Insulation Resistance: 1000 Megohms min.
6. Withstand Voltage: 1000V, AC/minute.
7. Durability: 1000 mating circles min.

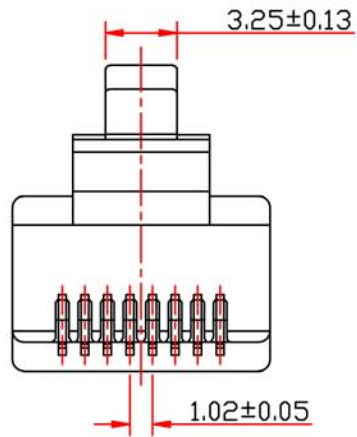

X±	.X± 0.20	.XX± 0.10	NAME<INTENDED USE> 8P8C R PLUG	TITLE: <b>成品图</b>
X° ± 1°	.X° ±	.XX° ±	PART NO.<INTENDED USE> R8800-1XX-100	
UNITS: mm	DATE: 2011/4/28		APPD: Wenjun Qiu	DWG NO. C8-02
MAT'L			CHKD: Chenkun	 SCALE SHEET REV N/A 1/1 x
			DR: Chenkun	